OKLAHOMA CERTIFIED CORNER RECORD

_____ Existing ___X___ Obliterated _____ Lost

C.M. Document No. _____

● CORNER MONUMENT
○ REFERENCE CORNER



S1/4 Corner of Section 7 Township 1 North Range 11 West

Meridian I.M. County Comanche

DESCRIPTION OF ORIGINAL MONUMENT AND ACCESSORIES AND ANY SUBSEQUENT RESTORATION: (Give Sources of Information)

Set Sandstone 17 x 11 x 3

Department of Libraries GLO Notes.

MONUMENT DESCRIPTION:

Description of Corner Evidence Found:

Found 1/2" Iron Pin (Did not match ODOT ties to "X's" on Alignment Map (S.W.O. 2412 (1))
Did not fit with 1906 subdivision corners

Matches ties of CCR Filed by Smith-Roberts-Johnson, PLS 985, dated 10 December 1987.
(Smith-Roberts-Johnson Re-Established 1/4 corner using single proportioning.)

Description of Corner Evidence Set:

Set 5/8" Iron Pin w/City of Lawton Engineering Department Cap.
Re-Established 1/4 corner using I-44 Alignment Plans [S.W.O. 2412 (1) - E.C. No. 179, Dated 17 November 1961].
Also used Sub-Division Plat of Capital Hills Sub-Division, Dated 1906 Territory of Oklahoma.
Plat is a Sub-Division of the SW 1/4 of Section 7, T-1-N, R-11-W, and had original corners intact

Coordinates established using classical static GPS, minimum two independent vectors
Included in the HPGN adjustment of 1993

REFERENCE MEASURMENTS: (At Least Three)

	Description:	Distance Feet [redacted]	Bearing True ☐ Magnetic ☒ No Declination
RP # 1	Set IP5 in place of 80d Nail (ODOT P.O.S.T. 1423.051)	196.01'	East
RP # 2	Found IP4 from Smith-Roberts Ties of CCR Dated 10 December 1987	8.25'	S 43° W
RP # 3	60d Nail in Fence Corner Post	43.95'	S 45° W
RP # 4	"X" on Center of Headwall (ODOT)	65.13'	N 84° W
RP # 5	"X" on old Sidewalk at Department of Correction Building (ODOT)	146.84'	N 84° W
RP # 6	"X" on Center of Headwall	18.10'	N 17° W

SC #1	SW Corner Found Survey Marker	Ground Distance	2623.02'	Grid Distance	2622.73'	Grid Azimuth	N 89°47'42" W
SC #2	SE Corner Found 1/2" Iron Pin	Ground Distance	2628.85'	Grid Distance	2628.56'	Grid Azimuth	S 89°19'00" E

STATEMENT OF METHOD USED TO DETERMINE CORNER LOCATION: (Lost Corners Only)

SKETCH:

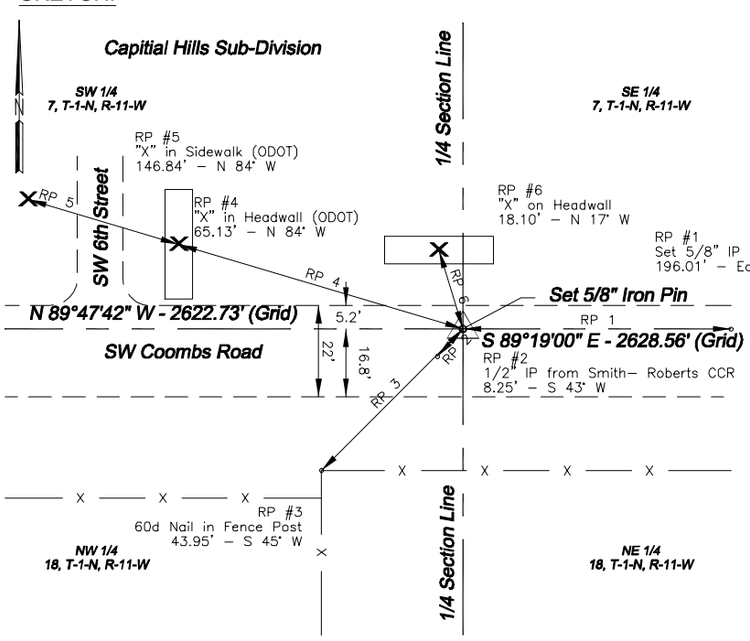

SURVEYOR'S CERTIFICATION: This is to certify that the monuments and accessories indicated above are correctly described and shown. I further certify that the corner records were checked for any filings prior to making this survey.

Signature Michael D. Porter, PLS 1514

City Of Lawton, Engineering Department

Firm

Phone Number

103 SW 4th Street (580) 581-3318

Street Address/Post Office Box

Lawton, Oklahoma 73501

City, State and Zip Code

15 April 2002 P.L.S. 1514

Date and Registration Number

OKLAHOMA STATE PLANE COORDINATES: NAD 1983 (ADJ 1993 HARN)
Coordinates are in US Survey Feet.

X: E 1849300.947 Y: N 448581.369 ZONE: SOUTH

SEAL: REGISTERED PROFESSIONAL LAND SURVEYOR MICHAEL DUANE PORTER 1514 OKLAHOMA

Accepted and Filed: _____

Archivist, Archives & Records Division
Oklahoma Department of Libraries
200 Northeast 18th Street
Oklahoma City, Oklahoma 73105

Date: _____

File Name: 71S2.dwg