


OKLAHOMA CERTIFIED CORNER RECORD

Existing X Obliterated _____ Lost _____

C.M. Document No. _____

N1/4 Corner of Section 30 Township 1 North Range 11 West

Meridian I.M. County Comanche



DESCRIPTION OF ORIGINAL MONUMENT AND ACCESSORIES AND ANY SUBSEQUENT RESTORATION: (Give Sources of Information)

Set Post, Raised Mounds with Pits, deposited charred stakes.

Department of Libraries GLO Notes.

MONUMENT DESCRIPTION:

Description of Corner Evidence Found:

Found IP4 fitted with a 2" Oklahoma Department of Transportation Aluminum Cap (ODOT C-16-40).
 Matches ties on CCR filed by Deral Paulk, PLS 1279, dated 8 June 2000.
 Matches ties on CCR filed by Duane R. Brunner, PLS 1314, dated 19 March 1996.
 Matches ties on CCR filed by Larry G. Williams, PLS 1327, dated 11 January 1995.

Coordinates established using classical static GPS, minimum two independent vectors
 Included in the HPGN adjustment of 1993

Description of Corner Evidence Set:

None


REFERENCE MEASUREMENTS: (At Least Three)

Description:	Distance		Bearing	
	Feet		True	Magnetic
RP # 1 IP4 (Not Located)	78.66'		<input type="checkbox"/>	<input checked="" type="checkbox"/>
RP # 2 IP4 (Not Located)	168.45'		<input type="checkbox"/>	<input checked="" type="checkbox"/>
RP # 3 IP4 (Not Located)	248.01'		<input type="checkbox"/>	<input checked="" type="checkbox"/>
RP # 4 60d Nail in Fence Corner	39.60'		<input type="checkbox"/>	<input checked="" type="checkbox"/>
RP # 5 80d Nail in line with North Fence	23.69'		<input type="checkbox"/>	<input checked="" type="checkbox"/>
RP # 6 60d Nail in West Gate Post	34.30'		<input type="checkbox"/>	<input checked="" type="checkbox"/>
RP # 7 Square Headed Bolt (Appx. 0.79 deep - Not Located)	1.84'		<input type="checkbox"/>	<input checked="" type="checkbox"/>
RP # 8 60d Nail in Power Pole	20.70'		<input type="checkbox"/>	<input checked="" type="checkbox"/>

SC # 1 NW Corner 2" Aluminum Cap (ODOT C-16-39)	Ground Dist.: 2628.38'	Grid Dist.: 2628.09'	Grid Bearing: N 89°28'24" W
SC # 2 NE Corner 2" Aluminum Cap (ODOT C-16-47)	Ground Dist.: 2634.93'	Grid Dist.: 2634.64'	Grid Bearing: S 89°28'32" E

STATEMENT OF METHOD USED TO DETERMINE CORNER LOCATION: (Lost Corners Only)

SKETCH:

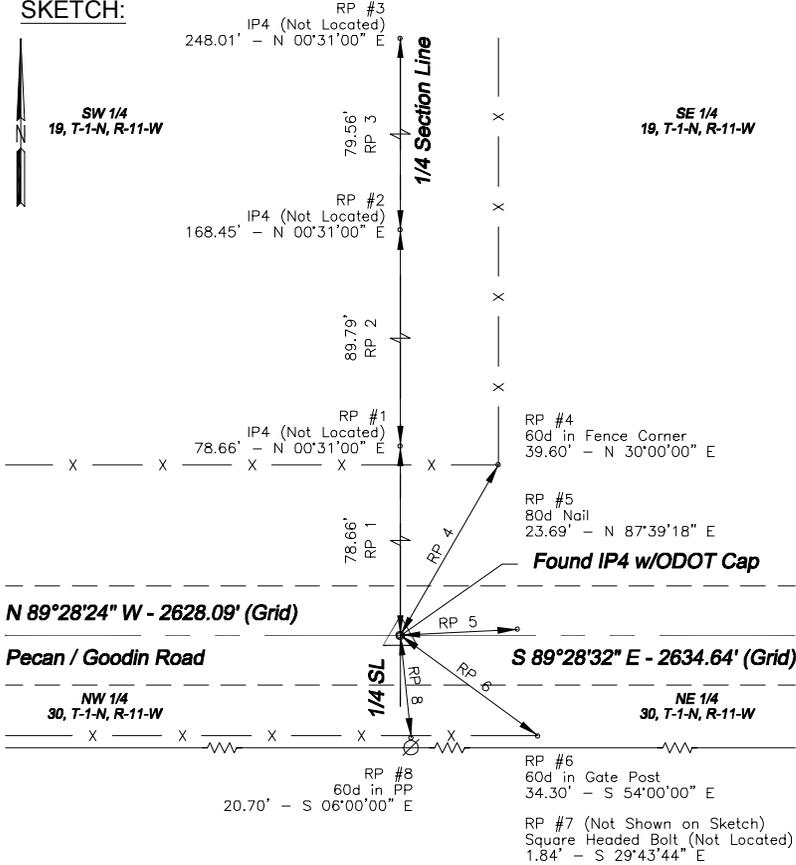


SURVEYOR'S CERTIFICATION: This is to certify that the monuments and accessories indicated above are correctly described and shown. I further certify that the corner records were checked for any filings prior to making this survey.

Signature: Edward Deral Paulk Jr., PLS 1279
 City of Lawton, Engineering Department
 Firm _____ Phone Number _____
 103 SW 4th Street (580) 581-3318
 Street Address/Post Office Box _____ Web Site _____
 Lawton, Oklahoma 73501 www.cityof.lawton.ok.us/engineering
 City, State and Zip Code _____
 14 August 2003 P.L.S. 1279
 Date and Registration Number _____

OKLAHOMA STATE PLANE COORDINATES: NAD 1983 (ADJ 1993 HARN)
 Coordinates are in US Survey Feet.
 X: E 1849281.529 Y: N 438018.599 ZONE: SOUTH

Accepted and Filed: _____
 Archivist, Archives & Records Division
 Oklahoma Department of Libraries
 200 Northeast 18th Street
 Oklahoma City, Oklahoma 73105

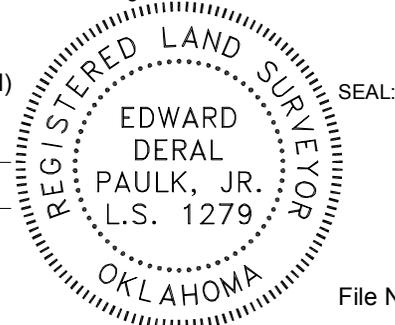

File Name: C-16-40-108S6.dwg