


OKLAHOMA CERTIFIED CORNER RECORD

X Existing _____ Obliterated _____ Lost

C.M. Document No. _____

N1/4 Corner of Section _____ 2 Township _____ 1 North Range _____ 12 West

Meridian I.M. County Comanche

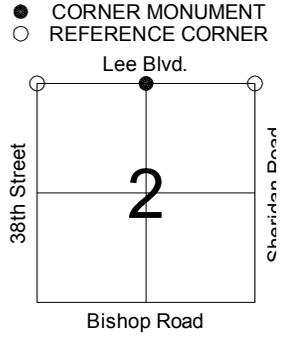

DESCRIPTION OF ORIGINAL MONUMENT AND ACCESSORIES AND ANY SUBSEQUENT RESTORATION: (Give Sources of Information)

Set Sandstone 5 x 10 x 7 (Resurvey Notes)
 Department of Libraries GLO Notes.

MONUMENT DESCRIPTION:

Description of Corner Evidence Found:

Found 4" Survey Spike
 Matches ties of CCR filed by Duane Brunner, PLS 1314, dated 1 April 1994.
 Matches ties of CCR filed by Duane Brunner, PLS 1314, dated 8 March 1994.
 Matches ties of CCR filed by Phil Stevenson, LS 1159, dated 14 April 1986.
 Coordinates established using classical static GPS, minimum two independent vectors
 Included in the HPGN adjustment of 1993

Description of Corner Evidence Set:

None


REFERENCE MEASUREMENTS: (At Least Three)

Description:	Distance		Bearing	
	Feet		True	Magnetic
RP # 1 1/2" Iron Pin Block Corner	57.98		<input type="checkbox"/>	<input checked="" type="checkbox"/> No Declinator
RP # 2 "X" on Back of Curb	44.27		<input type="checkbox"/>	<input checked="" type="checkbox"/> S 22°52'59" E
RP # 3 1/2" Iron Pin on South R/W of Lee Blvd.	49.76		<input type="checkbox"/>	<input checked="" type="checkbox"/> S 00°02'43" W
RP # 4 "X" on Concrete Sidewalk	92.29		<input type="checkbox"/>	<input checked="" type="checkbox"/> S 32°56'08" W
RP # 5 Small PK Nail found by Duane Brunner, January 1984.	2.40		<input type="checkbox"/>	<input checked="" type="checkbox"/> N 88°09'45" W
RP # 6 "X" of Median Back of Curb	42.39		<input type="checkbox"/>	<input checked="" type="checkbox"/> N 83°28'51" W
RP # 7 60d Nail in Power Pole	71.44		<input type="checkbox"/>	<input checked="" type="checkbox"/> N 50°28'01" W

SC # 1	NW Corner Found Large Survey Spike	Ground Distance	2638.27'	Grid Distance	2637.97'	Grid Azimuth	N 89°37'40" W
SC # 2	NE Corner Found "X" in Concrete Paving	Ground Distance	2640.15'	Grid Distance	2639.85'	Grid Azimuth	S 89°38'06" E

STATEMENT OF METHOD USED TO DETERMINE CORNER LOCATION: (Lost Corners Only)

SKETCH:

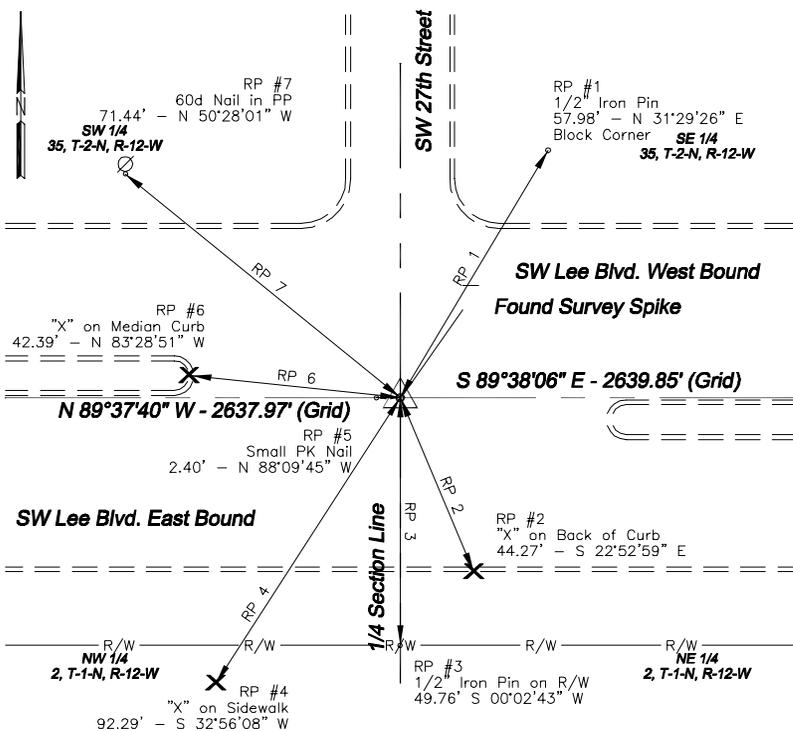

SURVEYOR'S CERTIFICATION: This is to certify that the monuments and accessories indicated above are correctly described and shown. I further certify that the corner records were checked for any filings prior to making this survey.

Signature Edward Deral Paulk Jr., PLS 1279
 City of Lawton, Engineering Department
 Firm _____ Phone Number _____
 103 SW 4th Street (580) 581-3318
 Street Address/Post Office Box _____
 Lawton, Oklahoma 73501
 City, State and Zip Code _____
 6 August 2003 P.L.S. 1279
 Date and Registration Number _____


OKLAHOMA STATE PLANE COORDINATES: NAD 1983 (ADJ 1993 HARN)
 Coordinates are in US Survey Feet.

X: E 1838791.439 Y: N 459198.510 ZONE: SOUTH

Accepted and Filed: _____

Archivist, Archives & Records Division
 Oklahoma Department of Libraries
 200 Northeast 18th Street
 Oklahoma City, Oklahoma 73105

Date: _____

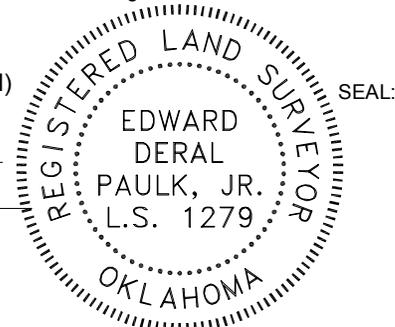

File Name: 59S6.dwg