

OKLAHOMA CERTIFIED CORNER RECORD


X Existing _____ Obliterated _____ Lost

C.M. Document No. _____

- CORNER MONUMENT
- REFERENCE CORNER

NWSE
1/64 Corner of Section 21 Township 2 North Range 11 West

Meridian I.M. County Comanche

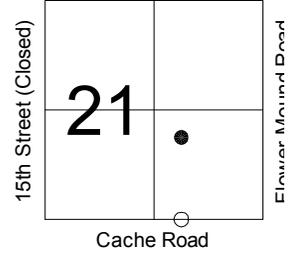

DESCRIPTION OF ORIGINAL MONUMENT AND ACCESSORIES AND ANY SUBSEQUENT RESTORATION: (Give Sources of Information)

Department of Libraries GLO Notes.

Not Set on Original Survey.

BLM Dependent Resurvey 1988.

From the W-E 1/64 Sec. Cor of Secs. 21 and 28. hereinfoe described.
 N 00°11' W, on the N. and S. centerline of the SW 1/4 of the SE 1/4 of Sec 21.
 19.985 chains (1319.01' appx.) The center W-SE 1/64 sec. cor of sec. 21.
 N 00°11' W, on the N. and S. centerline of the NW 1/4 of the SE 1/4 of sed. 21.
 9.990 chains (659.34' appx.) Point for the NW-SE 1/64 sec. cor. of sec. 21, at the intersection with the E. and W. centerline of the NW 1/4 SE 1/4 of sec 21.

At the Corner point
 Drive a rebar, 5/8 in. diam., 15 ins. long, with an aluminum cap, 2 ins diam., 2 ins. below the road surface, with cap marked.

MONUMENT DESCRIPTION:

Description of Corner Evidence Found:
 Found BLM Cap dated 1988



From Which:
 A 60d Nail in a hackberry, 28 ins. diam., no scribe marks, bears S 47° E a distance of 31 1/2 lks (20.79' appx.)

Corner is located N 35° W., a distance of 57 lks (37.62' appx.) from a fence post corner, lines extending S. and NW, and 10 lks (6.60' appx.) S. of the S. edge of a concrete driveway.

Coordinates established using classical static GPS, minimum two independent vectors
 Included in the HPGN adjustment of 1993

Description of Corner Evidence Set:
 None


REFERENCE MEASURMENTS: (At Least Three)

Description:	Distance	Bearing
	Feet	True <input type="checkbox"/> Magnetic <input checked="" type="checkbox"/> No Declination
RP # 1 60d in 28" Hackberry tree	20.79'	S 47° E
RP # 2 Fence corner post	37.62'	S 35° E
RP # 3 South Edge Concrete Driveway	6.6'	N 00° E

SC # 1 WE 1/64 Corner: Found BLM Cap	Ground Dist.: 1978.44'	Grid Dist.: 1978.22'	Grid Bearing: S 00°01'02" W
SC # 2 W 1/4	Ground Dist.:	Grid Dist.:	Grid Bearing:

STATEMENT OF METHOD USED TO DETERMINE CORNER LOCATION: (Lost Corners Only)

SKETCH:

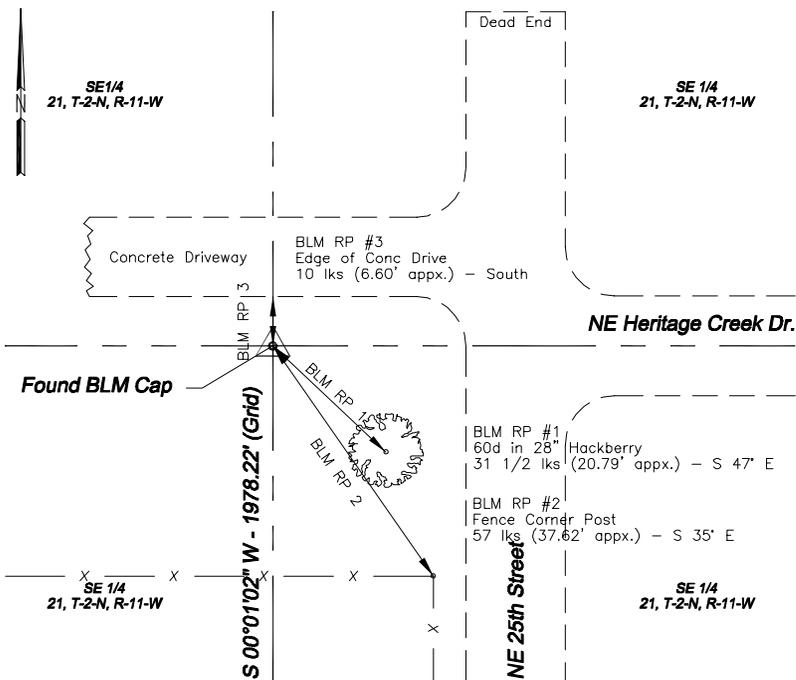

SURVEYOR'S CERTIFICATION: This is to certify that the monuments and accessories indicated above are correctly described and shown. I further certify that the corner records were checked for any filings prior to making this survey.

Signature: Michael D. Porter, PLS 1514
 City Of Lawton, Engineering Department
 Firm Phone Number
 103 SW 4th Street (580) 581-3318
 Street Address/Post Office Box Web Site
 Lawton, Oklahoma 73501 www.cityof.lawton.ok.us/engineering
 City, State and Zip Code
 22 August 2003 P.L.S. 1514
 Date and Registration Number

OKLAHOMA STATE PLANE COORDINATES: NAD 1983 (ADJ 1993 HARN)
 Coordinates are in US Survey Feet.

X: E 1860532.927 Y: N 471586.080 ZONE: SOUTH

Accepted and Filed: _____
 Archivist, Archives & Records Division
 Oklahoma Department of Libraries
 200 Northeast 18th Street
 Oklahoma City, Oklahoma 73105

