


OKLAHOMA CERTIFIED CORNER RECORD

X Existing \_\_\_\_\_ Obliterated \_\_\_\_\_ Lost

C.M. Document No. \_\_\_\_\_

S1/4 Corner of Section \_\_\_\_\_ 29 Township \_\_\_\_\_ 2 North Range \_\_\_\_\_ 11 West

Meridian I.M. County Comanche

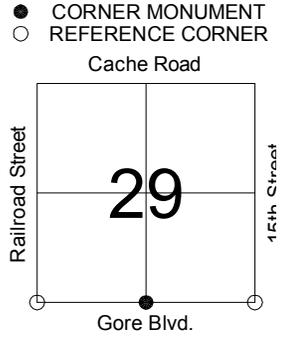

DESCRIPTION OF ORIGINAL MONUMENT AND ACCESSORIES AND ANY SUBSEQUENT RESTORATION: (Give Sources of Information)

1 Inch Square Iron Post  
Department of Libraries GLO Notes.

MONUMENT DESCRIPTION:

Description of Corner Evidence Found:

Found "X" in Concrete Pavement. Located in the North East Bound Lane of Gore Blvd.  
Matches ties on BLM Dependent Survey by Richard Widmar, Completed on 16 November 1988.  
Matches ties on CCR filed by Phillip Stevenson, PLS 1159, dated 18 December 1987.

Coordinates established using conventional Total Station and holding  
City of Lawton GPS Control Monuments 25A2 and 24A3 located in the Median of Gore Blvd.

Description of Corner Evidence Set:

None Set

REFERENCE MEASUREMENTS: (At Least Three)

Description:

RP #	Description	Distance	Bearing
RP # 1	60d Nail in High Voltage Power Pole	130.01'	N 09°19'08" E
RP # 2	PK Nail in Asphalt near East Median.	24.20'	N 22° E
RP # 3	"X" on Back of Curb West end of Median on Gore Blvd.	26.94'	N 38°53'30" E
RP # 4	Center of SSMH (First Manhole South of Gore).	152.06'	S 35°49'02" E
RP # 5	Center of Bell on Telephone Manhole (TMH).	29.30'	S 25°15'29" E
RP # 6	60d Nail in Light Pole.	57.26'	S 57°22'45" W
RP # 7	"X" in Concrete Roadway	4.15'	West
RP # 8	"X" on Back of Curb East end of Median on Gore Blvd.	32.08'	N 47°13'37" W


Distance	Bearing	
	True	Magnetic
Feet	<input type="checkbox"/>	<input checked="" type="checkbox"/>
	No Declination	

NOTE: Bearings based on a Survey done by E. Morales.

SC # 1	SE Corner	Found 7/8" Iron Pin on CCR by Randy Mosley 1986.	Ground Dist.: 2622.38'	Grid Dist.: 2622.09'	Grid Bearing: S 89°27'57" E
SC # 2	SW Corner	Found Axle in Concrete Pavement CoL CCR 25S1.	Ground Dist.: 2630.88'	Grid Dist.: 2630.59'	Grid Bearing: N 89°27'13" W

STATEMENT OF METHOD USED TO DETERMINE CORNER LOCATION: (Lost Corners Only)

SKETCH:

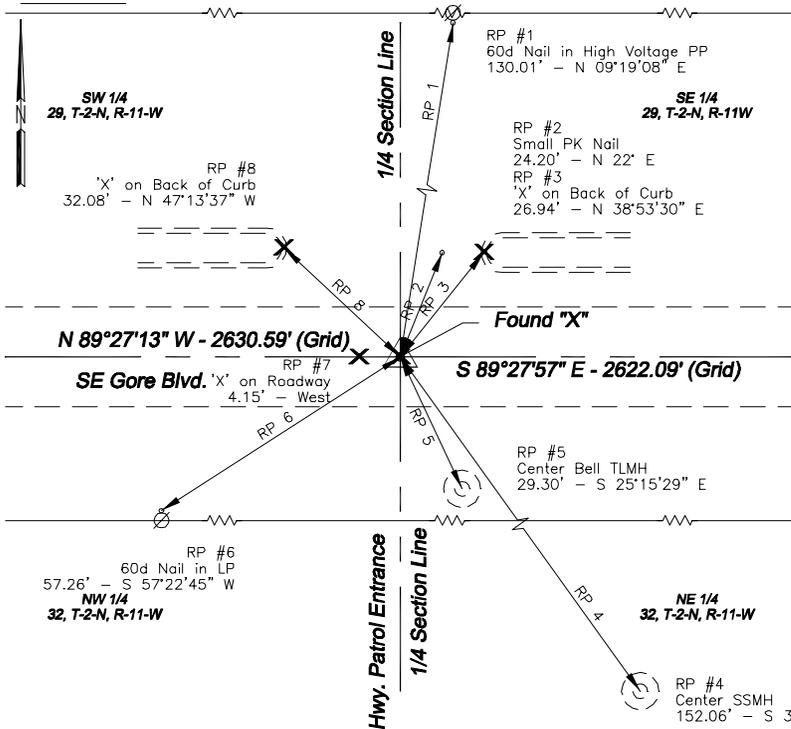


SURVEYOR'S CERTIFICATION: This is to certify that the monuments and accessories indicated above are correctly described and shown. I further certify that the corner records were checked for any filings prior to making this survey.

Signature: Edward Deral Paulk Jr., PLS 1279  
City Of Lawton, Engineering Department  
Firm \_\_\_\_\_ Phone Number \_\_\_\_\_  
103 SW 4th Street (580) 581-3318  
Street Address/Post Office Box \_\_\_\_\_ Web Site \_\_\_\_\_  
Lawton, Oklahoma 73501 www.cityof.lawton.ok.us/engineering  
City, State and Zip Code \_\_\_\_\_  
11 August 2003 P.L.S. 1279  
Date and Registration Number \_\_\_\_\_

OKLAHOMA STATE PLANE COORDINATES: NAD 1983 (ADJ 1993 HARN)  
Coordinates are in US Survey Feet.

X: E 1854583.031 Y: N 464383.445 ZONE: SOUTH

Accepted and Filed: \_\_\_\_\_  
Archivist, Archives & Records Division  
Oklahoma Department of Libraries  
200 Northeast 18th Street  
Oklahoma City, Oklahoma 73105

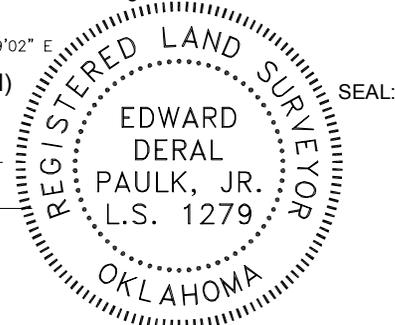

File Name: 24S2.dwg