


OKLAHOMA CERTIFIED CORNER RECORD

X Existing _____ Obliterated _____ Lost

C.M. Document No. _____

NE Corner of Section 30 Township 2 North Range 11 West

Meridian I.M. County Comanche

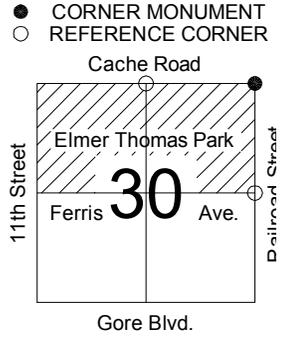

DESCRIPTION OF ORIGINAL MONUMENT AND ACCESSORIES AND ANY SUBSEQUENT RESTORATION: (Give Sources of Information)

Set Sandstone 17x12x5 1/2

Department of Libraries GLO Notes.
 Fractional Surveyed by A.F. Dunnington.
 ReSurveyed by Samuel P. Matthews in 1913 BLM notes.
 Dependent Survey done by BLM 1988 Set aluminum post 28" long, 2 1/2" Dia, flush with the ground with aluminum cap on top marked.

MONUMENT DESCRIPTION:

Description of Corner Evidence Found:


Found BLM aluminum Cap from 1988 BLM Dependent Survey.
 Matches ties on CCR filed by Duane R. Brunner, PLS 1314, dated 23 January 1996.

Corner is the NE Corner of City of Lawton's Elmer Thomas Park.

Coordinates established using classical static GPS, minimum two independent vectors
 Included in the HPGN adjustment of 1993

Description of Corner Evidence Set:

Set 5/8" x 24" Iron Pin on West side of BLM Cap w/City of Lawton cap for Location Purposes only.

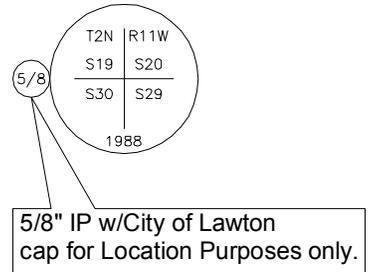


REFERENCE MEASUREMENTS: (At Least Three)

Description:	Distance	Bearing	
	Feet	True	Magnetic
RP # 1 'X' on East Edge of Pavement on North Bound Lane on I-44.	74.75'	<input type="checkbox"/>	No Declination
RP # 2 'X' on West Edge of Pavement on North Bound on Ramp to I44 from 2nd Street.	33.54'	<input type="checkbox"/>	N 60° E
RP # 3 5/8" Gas Pipe Corner #5 Lawton Pumping Station 1913. (Between RR Tracks on RR R/W Intersection)	294.05'	<input type="checkbox"/>	N 78° E
RP # 4 'X' on East Edge of Pavement on North Bound lane on I-44.	82.10'	<input checked="" type="checkbox"/>	S 79°27'30" E
RP # 5 ODOT Brass Cap C-16-177 (Hwy Department Section Corner) Set IP5 on East Side w/CoL Cap for Location Purposes Only.	18.07'	<input checked="" type="checkbox"/>	S 52° E
RP # 6 ODOT Brass Cap C-16-6 (Control)	372.33'	<input checked="" type="checkbox"/>	S 45° E

SC # 1 E 1/4 Corner Found 5/8" IP (Set from BLM survey 1988)	Ground Dist.: 2645.37'	Grid Dist.: 2645.07'	Grid Bearing: S 00°24'35" W
SC # 2 N 1/4 Corner Found 2" PK Nail (Set from BLM Survey 1988)	Ground Dist.: 2656.05'	Grid Dist.: 2655.75'	Grid Bearing: N 89°55'33" W

STATEMENT OF METHOD USED TO DETERMINE CORNER LOCATION: (Lost Corners Only)

SKETCH:

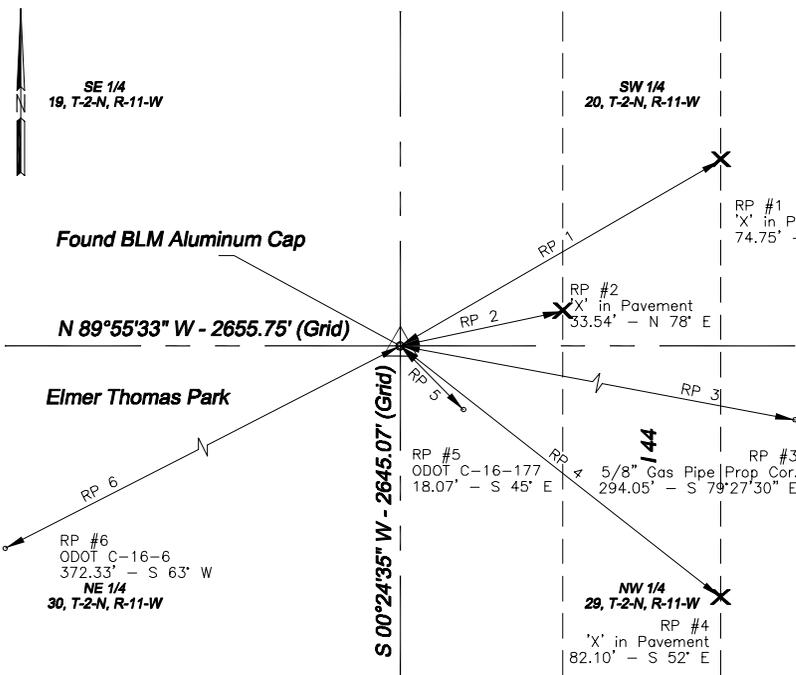

SURVEYOR'S CERTIFICATION: This is to certify that the monuments and accessories indicated above are correctly described and shown. I further certify that the corner records were checked for any filings prior to making this survey.


Signature: Edward Deral Paulk Jr., PLS 1279
 City of Lawton, Engineering Department
 Firm _____ Phone Number _____
 103 SW 4th Street (580) 581-3318
 Street Address/Post Office Box _____ Web Site _____
 Lawton, Oklahoma 73501 www.cityof.lawton.ok.us/engineering
 City, State and Zip Code _____
 4 August 2003 P.L.S. 1279
 Date and Registration Number _____

OKLAHOMA STATE PLANE COORDINATES: NAD 1983 (ADJ 1993 HARN)
 Coordinates are in US Survey Feet.

X: E 1851990.523 Y: N 469699.613 ZONE: SOUTH

Accepted and Filed: _____
 Archivist, Archives & Records Division
 Oklahoma Department of Libraries
 200 Northeast 18th Street
 Oklahoma City, Oklahoma 73105

Date: _____

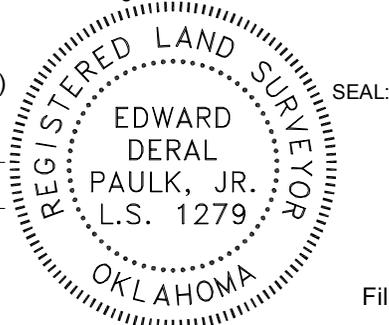

File Name: 25S7BLM.dwg