


OKLAHOMA CERTIFIED CORNER RECORD

X Existing _____ Obliterated _____ Lost

C.M. Document No. _____

N 1/16 Corner of Section 34 Township 2 North Range 11 West

Meridian I.M. County Comanche



DESCRIPTION OF ORIGINAL MONUMENT AND ACCESSORIES AND ANY SUBSEQUENT RESTORATION: (Give Sources of Information)

Not set on Original Survey.

Department of Libraries GLO Notes

MONUMENT DESCRIPTION:

Description of Corner Evidence Found:

- Found 3/8" Iron Pin.
- Matches Ties of CCR filed by Duane R. Brunner, PLS 1314, dated 11 July 1996.
- Matches Ties of CCR filed by Duane R. Brunner, PLS 1314, dated 25 February 1994.
- Matches description from Carriage Hills Addition Plat. Filed by J.B. Howle, PLS 352, dated October 1968.

Coordinates established using classical static GPS, minimum two independent vectors
Included in the HPGN adjustment of 1993

Description of Corner Evidence Set:

- Added Three (3) 1/2" Iron Pins @ 50, 100, 150 S 57° E for new references.
- Flower Mound Road to be widened and corner expected to be destroyed during construction.


REFERENCE MEASUREMENTS: (At Least Three)

Description:	Distance		Bearing	
	Feet		True	Magnetic
RP # 1 Found 3/8" Iron Pin (SW Lot Corner Lot 1, Block 1)	186.75'		<input type="checkbox"/>	<input checked="" type="checkbox"/>
RP # 2 Found 3/8" Iron Pin (NW Lot Corner Lot 1, Block 2)	130.06'		<input type="checkbox"/>	<input checked="" type="checkbox"/>
RP # 3 Set 1/2" Iron Pin	50.0'		<input type="checkbox"/>	<input checked="" type="checkbox"/>
RP # 4 Set 1/2" Iron Pin	100.0'		<input type="checkbox"/>	<input checked="" type="checkbox"/>
RP # 5 Set 1/2" Iron Pin	150.0'		<input type="checkbox"/>	<input checked="" type="checkbox"/>
RP # 6 Top Fire Hydrant (ADV 2000)	68.9'		<input type="checkbox"/>	<input checked="" type="checkbox"/>

SC # 1	NW Corner	Survey Spike	Ground Dist.: 1320.80'	Grid Dist.: 1320.65'	Grid Bearing: N 00°18'15" E
SC # 2	W 1/4 Corner	Found 1/2" Iron Pin	Ground Dist.: 1320.85'	Grid Dist.: 1320.70'	Grid Bearing: S 00°16'35" W

STATEMENT OF METHOD USED TO DETERMINE CORNER LOCATION: (Lost Corners Only)

SKETCH:

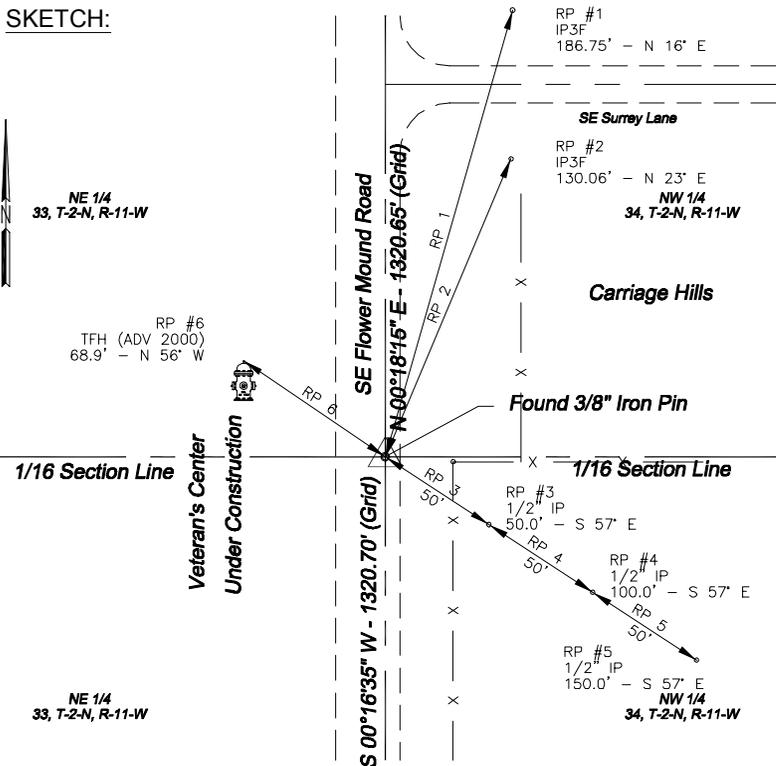

SURVEYOR'S CERTIFICATION: This is to certify that the monuments and accessories indicated above are correctly described and shown. I further certify that the corner records were checked for any filings prior to making this survey.

Signature: Edward Deral Paulk Jr., PLS 1279
 City of Lawton, Engineering Department
 Firm _____ Phone Number _____
 103 SW 4th Street (580) 581-3318
 Street Address/Post Office Box _____
 Lawton, Oklahoma 73501
 City, State and Zip Code _____
 12 August 2003 P.L.S. 1279
 Date and Registration Number _____

OKLAHOMA STATE PLANE COORDINATES: NAD 1983 (ADJ 1993 HARN)
 Coordinates are in US Survey Feet.
 X: E 1862496.003 Y: N 462989.288 ZONE: SOUTH

Accepted and Filed: _____
 Archivist, Archives & Records Division
 Oklahoma Department of Libraries
 200 Northeast 18th Street
 Oklahoma City, Oklahoma 73105

