OKLAHOMA CERTIFIED CORNER RECORD

_____ Existing ___X___ Obliterated _____ Lost

C.M. Document No. _____

● CORNER MONUMENT
○ REFERENCE CORNER



W1/4 Corner of Section 27 Township 2 North Range 11 West

Meridian I.M. County Comanche

DESCRIPTION OF ORIGINAL MONUMENT AND ACCESSORIES AND ANY SUBSEQUENT RESTORATION: (Give Sources of Information)

Set Sandstone 16 x 12 x 4 1/2

Department of Libraries GLO Notes

ODOT C-16-236. Set by Dewayne Walden, 26 March 1971.
BLM notes from 1988, From the 1/4 Section Corner of section 27 and 28, monumented with an Iron Pipe 2" in Dia., firmly set 18" below the surface of the asphalt pavement, Corner accepted by the BLM.
1971 accessories:
an IP4 bears N 66 1/4° E 65 links in distance, an IP4 bears S 66 1/4° E 61 links in distance,
an IP4 bears S 66 1/4° W 45 links in distance,

MONUMENT DESCRIPTION:

Description of Corner Evidence Found:

Corner Destroyed during resurfacing of Flower Mound Road.

Coordinates established using classical static GPS, minimum two independent vectors
Included in the HPGN adjustment of 1993

Description of Corner Evidence Set:

Set 3" Survey Marker w/City of Lawton Washer,
Set by ties on CCR filed by Duane R. Brunner, PLS 1314, dated 8 July 1996.
Corner is approx. in the Middle of the South Bound lane of Flower Mound Road.

REFERENCE MEASURMENTS: (At Least Three)

	Description:	Distance Feet [redacted]		Bearing True ☐ Magnetic ☒ No Declination
RP # 1	Found 1/2" Iron Pin in Fence	41.85'		N 63° E
RP # 2	Found 60d Nail in crooked corner post	42.44'		N 89° E
RP # 3	Found 3/8" Iron Pin the E-W Fence	49.5'		East
RP # 4	Found 60d Nail in Power Pole	48.70'		S 84° W
RP # 5	Found 1/2" Iron Pin (LS 1281)	33.58'		West
BLM # 1	1/2" Iron Pin	42.9'	(65 Links)	N 66 1/4° E
BLM # 2	1/2" Iron Pin	40.26'	(61 Links)	S 66 1/4° E
BLM # 3	1/2" Iron Pin	29.70'	(45 Links)	S 66 1/4° W

SC # 1	NW Corner Steel Bar (14S1)	Ground Dist.:	2641.82'	Grid Dist.: 2641.52'	Grid Bearing:	N 00°02'21" E
SC # 2	SW Corner Survey Spike (23S1)	Ground Dist.:	2642.00'	Grid Dist.: 2641.70'	Grid Bearing:	S 00°03'21" W

STATEMENT OF METHOD USED TO DETERMINE CORNER LOCATION: (Lost Corners Only)

SKETCH:

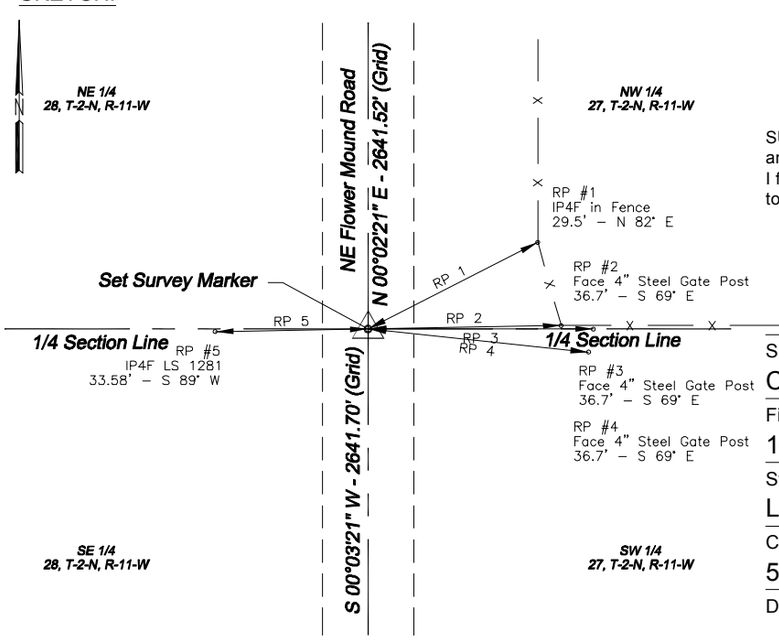

SURVEYOR'S CERTIFICATION: This is to certify that the monuments and accessories indicated above are correctly described and shown. I further certify that the corner records were checked for any filings prior to making this survey.

Signature: Edward Deral Paulk Jr., PLS 1279

City Of Lawton, Engineering Department
Firm

Phone Number
103 SW 4th Street (580) 581-3318
Street Address/Post Office Box

Web Site
Lawton, Oklahoma 73501 www.cityof.lawton.ok.us/engineering
City, State and Zip Code

5 August 2003 P.L.S. 1279
Date and Registration Number

SEAL:

REGISTERED LAND SURVEYOR
EDWARD DERAL PAULK, JR. L.S. 1279
OKLAHOMA

OKLAHOMA STATE PLANE COORDINATES: NAD 1983 (ADJ 1993 HARN)
Coordinates are in US Survey Feet.

X: E 1862505.580 Y: N 466950.621 ZONE: SOUTH

Accepted and Filed: _____

Archivist, Archives & Records Division
Oklahoma Department of Libraries
200 Northeast 18th Street
Oklahoma City, Oklahoma 73105

Date: _____

File Name C-16-236-22S4.dwg