


OKLAHOMA CERTIFIED CORNER RECORD

X Existing _____ Obliterated _____ Lost

C.M. Document No. _____

CTR _____ Corner of Section 22 Township 2 North Range 11 West

Meridian I.M. County Comanche

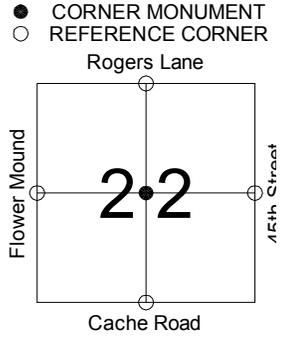

DESCRIPTION OF ORIGINAL MONUMENT AND ACCESSORIES AND ANY SUBSEQUENT RESTORATION: (Give Sources of Information)

Department of Libraries GLO Notes.
Set Sandstone 18"x15"x4"
C.L. DuBois December 1873

MONUMENT DESCRIPTION:

Description of Corner Evidence Found:

Stone marked with C 1/4 on East face
Matches ODOT Form-11 of C-16-271 (1993)
Matches CCR filed by Rinaldi, PLS 1306, 24 June 1993
Matches CCR filed by Brunner, PLS 1314, 24 June 1996

Note-C-16-88 has been destroyed. We recovered the cap.

Coordinates established using classical static GPS, minimum two independent vectors
Included in the HPGN adjustment of 1993 (1146.33 NAVD88 1061.92 Ellipsoid)

Description of Corner Evidence Set:

None

REFERENCE MEASUREMENTS: (At Least Three)

Description:


| Description: | Distance | | Bearing | |
|---------------------------------|----------|--|--------------------------|--|
| | Feet | | True | Magnetic |
| RP # 1 IP4 | 48.39' | | <input type="checkbox"/> | <input checked="" type="checkbox"/> No Declination |
| RP # 2 IP4 | 99.49' | | <input type="checkbox"/> | S 45 18° 00" W |
| RP # 3 IP4 | 157.77' | | <input type="checkbox"/> | S 45 18° 00" W |
| RP # 4 3" Steel Fence Post Face | 1.63' | | <input type="checkbox"/> | S 45 18° 00" W South |
| RP # 5 Mag Nail in Power Pole | 23.75' | | <input type="checkbox"/> | West |
| RP # 6 IP4 (lot corner) | 182.93' | | <input type="checkbox"/> | N 89 40° 45" W |

Note- Stone is under a North-South fence and an IP4 is driven on the west side of the stone

| | | | | | |
|--------|--------------|-------------------|------------------------|----------------------|-----------------------------|
| SC # 1 | N 1/4 Corner | C-16-238 ODOT Cap | Ground Dist.: 2648.29' | Grid Dist.: 2647.99' | Grid Bearing: N 00°07'17" E |
| SC # 2 | E 1/4 Corner | C-16-241 ODOT Cap | Ground Dist.: 2651.44' | Grid Dist.: 2651.13' | Grid Bearing: S 89°57'44" E |
| SC # 3 | S 1/4 Corner | C-16-239 | Ground Dist.: 2638.09' | Grid Dist.: 2637.78' | Grid Bearing: S 00°01'03" W |
| SC # 4 | W 1/4 Corner | IP5 | Ground Dist.: 2642.37' | Grid Dist.: 2642.07' | Grid Bearing: N 89°41'32" W |

STATEMENT OF METHOD USED TO DETERMINE CORNER LOCATION: (Lost Corners Only)

SKETCH:

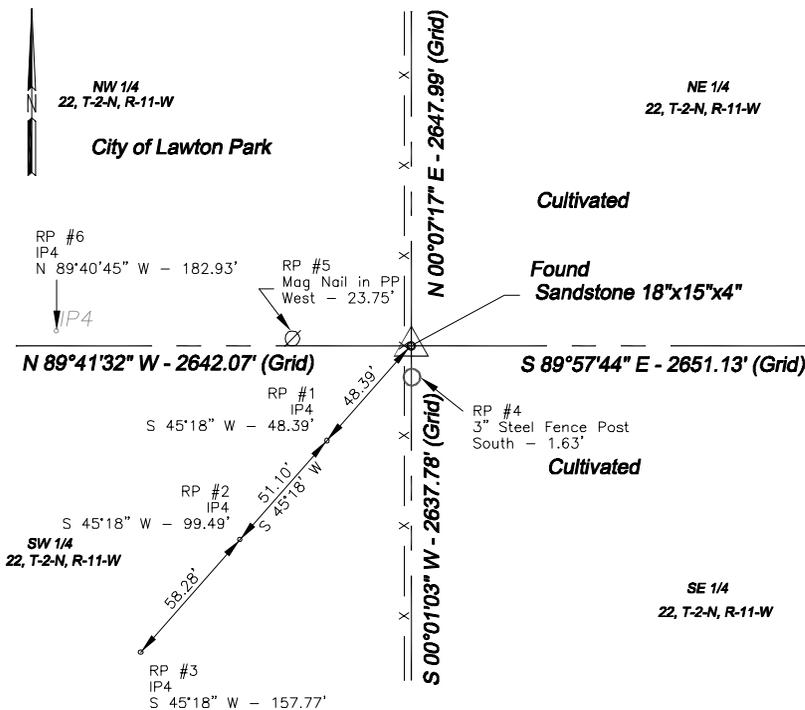

SURVEYOR'S CERTIFICATION: This is to certify that the monuments and accessories indicated above are correctly described and shown. I further certify that the corner records were checked for any filings prior to making this survey.

Signature: Edward Deral Paulk Jr., PLS 1279
City Of Lawton, Engineering Department
Firm _____ Phone Number _____
103 SW 4th Street (580) 581-3318
Street Address/Post Office Box _____
Lawton, Oklahoma 73501
City, State and Zip Code _____
4 August 2003 P.L.S. 1279
Date and Registration Number _____


OKLAHOMA STATE PLANE COORDINATES: NAD 1983 (ADJ 1993 HARN)
Coordinates are in US Survey Feet.

X: N 472220.245 Y: E 1865149.360 ZONE: SOUTH

Accepted and Filed: _____

Archivist, Archives & Records Division
Oklahoma Department of Libraries
200 Northeast 18th Street
Oklahoma City, Oklahoma 73105

Date: _____

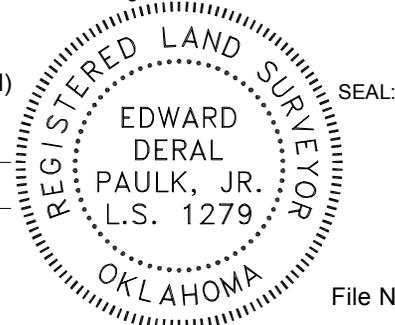

File Name: C-16-271-15S9.dwg