


OKLAHOMA CERTIFIED CORNER RECORD

X Existing _____ Obliterated _____ Lost

C.M. Document No. _____

CTR _____ Corner of Section 27 Township 2 North Range 11 West

Meridian I.M. County Comanche



DESCRIPTION OF ORIGINAL MONUMENT AND ACCESSORIES AND ANY SUBSEQUENT RESTORATION: (Give Sources of Information)

Set Sandstone 18 x 12 x 4
Department of Libraries GLO Notes.

MONUMENT DESCRIPTION:

Description of Corner Evidence Found:

Found Chisled 'X' in Concrete Fence Post
Matches ties of CCR filed by Deral Paulk, PLS 1279, dated 20 July 2000.
Matches ties on CCR filed by Dennie J. Hightower, PLS 1285, dated 24 January 1994.
Matches ties on ODOT Form-11 C-16-275 filed by Dewayne Walden, dated 26 March 1971.

Coordinates established using classical static GPS, minimum two independent vectors
Included in the HPGN adjustment of 1993

Description of Corner Evidence Set:

None


REFERENCE MEASUREMENTS: (At Least Three)

Description:	Distance	Bearing
	Feet	True <input type="checkbox"/> Magnetic <input checked="" type="checkbox"/> No Declination
RP # 1 IP4 (Hightower)	57.66'	N 47°44'19" E
RP # 2 60d Nail in Fence Post (City of Lawton)	4.10'	S 74°00'00" E
RP # 3 IP4 (Hightower)	46.89'	S 51°18'12" E
RP # 4 IP4 (ODOT)	100.00'	N 89°32'57" W
RP # 5 IP4 (ODOT Not Located)	200.00'	N 89°32'57" W
RP # 6 IP4 (ODOT Not Located)	300.00'	N 89°32'57" W
RP # 7 IP4 (Hightower)	56.88'	N 15°23'00" W
RP # 8 60d Nail in Fence Post (City of Lawton)	32.00'	N 06°00'00" W

SC # 1	N 1/4 Corner: Found Large Spike	Ground Dist.: 2652.20'	Grid Dist.: 2651.89'	Grid Bearing: N 00°03'15" E
SC # 2	E 1/4 Corner: Found 3/4" Brass Rod	Ground Dist.: 2633.13'	Grid Dist.: 2632.82'	Grid Bearing: S 89°57'04" E
SC # 3	S 1/4 Corner: 80d Nail	Ground Dist.: 2631.46'	Grid Dist.: 2631.15'	Grid Bearing: S 00°12'02" W
SC # 4	W 1/4 Corner: Survey Marker	Ground Dist.: 2640.84'	Grid Dist.: 2640.54'	Grid Bearing: N 89°33'54" W

STATEMENT OF METHOD USED TO DETERMINE CORNER LOCATION: (Lost Corners Only)

SKETCH:

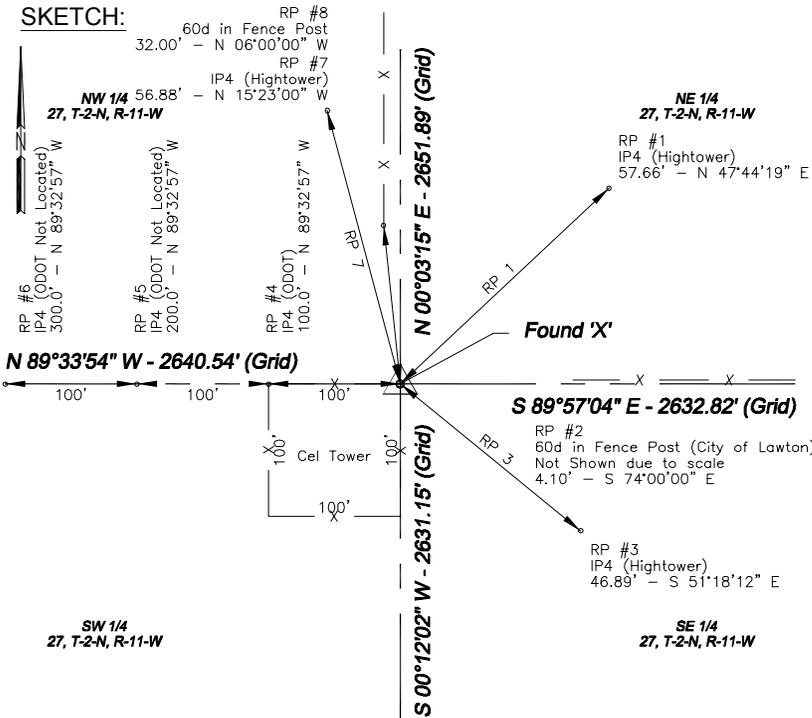

SURVEYOR'S CERTIFICATION: This is to certify that the monuments and accessories indicated above are correctly described and shown. I further certify that the corner records were checked for any filings prior to making this survey.

Signature: Edward Deral Paulk Jr., PLS 1279
City of Lawton, Engineering Department
 Firm _____ Phone Number _____
 103 SW 4th Street (580) 581-3318
 Street Address/Post Office Box _____ Web Site _____
 Lawton, Oklahoma 73501 www.cityof.lawton.ok.us/engineering
 City, State and Zip Code _____
 21 August 2003 P.L.S. 1279
 Date and Registration Number _____


OKLAHOMA STATE PLANE COORDINATES: NAD 1983 (ADJ 1993 HARN)
Coordinates are in US Survey Feet.

X: E 1865146.040 Y: N 466930.570 ZONE: SOUTH

Accepted and Filed: _____

Archivist, Archives & Records Division
Oklahoma Department of Libraries
200 Northeast 18th Street
Oklahoma City, Oklahoma 73105

Date: _____



SEAL:

File Name: C-16-275-22S9.dwg