

OKLAHOMA CERTIFIED CORNER RECORD

X Existing _____ Obliterated _____ Lost


C.M. Document No. _____

CTR _____ Corner of Section _____ 35 Township _____ 2 North Range _____ 12 West

Meridian I.M. County Comanche

DESCRIPTION OF ORIGINAL MONUMENT AND ACCESSORIES AND ANY SUBSEQUENT RESTORATION: (Give Sources of Information)

Not Set on Original Survey.
Department of Libraries GLO Notes.



MONUMENT DESCRIPTION:

Description of Corner Evidence Found:

Found IP4
Matches ties on CCR filed by Duane R. Brunner, PLS 1314, dated 5 February 1996.
I used this pin as the center of section, it fits the descriptions of (4) four sub-divisions in the vicinity. It also fits the location, by intersection, of the (4) four 1/4 corners to a reasonable degree of accuracy.

Coordinates established using classical static GPS, minimum two independent vectors
Included in the HPGN adjustment of 1993

Description of Corner Evidence Set:

None Set


REFERENCE MEASUREMENTS: (At Least Three)

| Description: | Distance | Bearing |
|---|----------|---|
| | Feet | True <input type="checkbox"/> Magnetic <input checked="" type="checkbox"/> No Declination |
| RP # 1 IP3 SW Corner Block 3, Replat Block 22, Highland Park Addition | 156.00' | North |
| RP # 2 IP3 NW Corner Block 4, Replat Block 22, Highland Park Addition | 106.00' | North |
| RP # 3 NOAA Brass Cap X-37 Reset Set in Concrete Headwall | 29.87' | S 13°31'53" W (Grid) |
| RP # 4 Chisled 'X' on Back of Curb (West Curb of 27th Street) | 39.50' | West |
| RP # 5 Center SSMH | 23.40' | N 86° W |
| RP # 6 Center SSMH | 34.50' | N 50° W |

| | | | |
|---|------------------------|----------------------|-----------------------------|
| SC # 1 N 1/4 Corner | Ground Dist.: _____ | Grid Dist.: _____ | Grid Bearing: _____ |
| SC # 2 E 1/4 Corner 'X' in Concrete Road (Sheridan) | Ground Dist.: 2636.92' | Grid Dist.: 2636.62' | Grid Bearing: S 89°38'04" E |
| SC # 3 S 1/4 Corner Edit Corner Call | Ground Dist.: 2634.49' | Grid Dist.: 2634.19' | Grid Bearing: S 00°09'09" W |
| SC # 4 W 1/4 Corner IP5F (38th Street Median) | Ground Dist.: 2643.60' | Grid Dist.: 2643.30' | Grid Bearing: N 89°31'38" W |

STATEMENT OF METHOD USED TO DETERMINE CORNER LOCATION: (Lost Corners Only)

SKETCH:

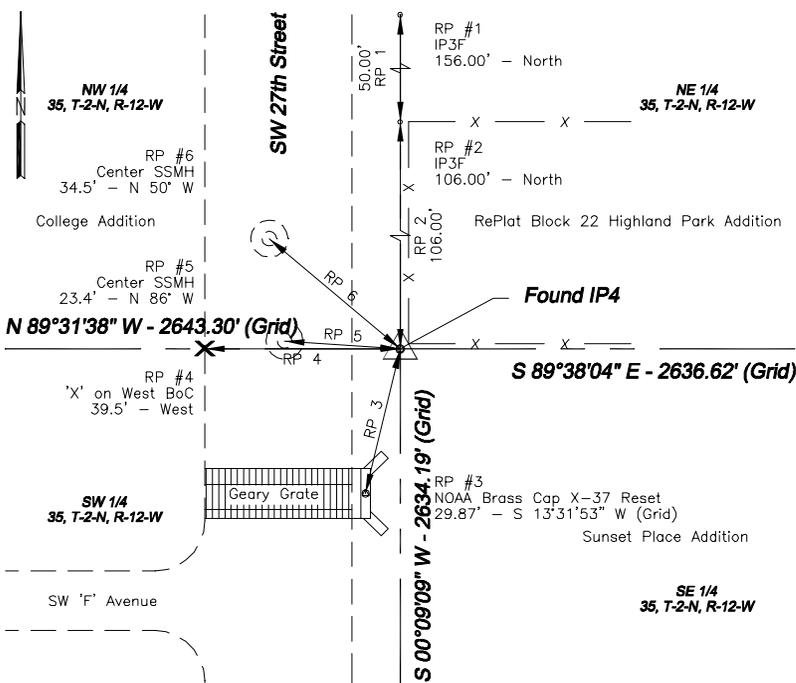


SURVEYOR'S CERTIFICATION: This is to certify that the monuments and accessories indicated above are correctly described and shown. I further certify that the corner records were checked for any filings prior to making this survey.

Signature: Edward Deral Paulk Jr., PLS 1279
City of Lawton, Engineering Department
Firm _____ Phone Number _____
103 SW 4th Street (580) 581-3318
Street Address/Post Office Box _____ Web Site _____
Lawton, Oklahoma 73501 www.cityof.lawton.ok.us/engineering
City, State and Zip Code _____
16 September 2003 P.L.S. 1279
Date and Registration Number _____

OKLAHOMA STATE PLANE COORDINATES: NAD 1983 (ADJ 1993 HARN)
Coordinates are in US Survey Feet.

X: E 1838798.445 Y: N 461832.693 ZONE: SOUTH

Accepted and Filed: _____
Archivist, Archives & Records Division
Oklahoma Department of Libraries
200 Northeast 18th Street
Oklahoma City, Oklahoma 73105

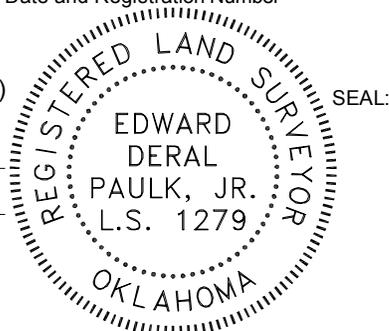

File Name: 40S9.dwg