


OKLAHOMA CERTIFIED CORNER RECORD

Existing X Obliterated \_\_\_\_\_ Lost \_\_\_\_\_

C.M. Document No. \_\_\_\_\_

W1/4 Corner of Section 30 Township 1 North Range 11 West

Meridian I.M. County Comanche



DESCRIPTION OF ORIGINAL MONUMENT AND ACCESSORIES AND ANY SUBSEQUENT RESTORATION: (Give Sources of Information)

Set Sandstone 5 x 8 x 5  
 Department of Libraries GLO Resurvey Notes

MONUMENT DESCRIPTION:

Description of Corner Evidence Found:

Found PK Nail from References, Oklahoma Department of Transportation (ODOT C-16-38).  
 Matches ties on CCR filed by Deral Paulk, PLS 1279, dated 8 June 2000.  
 Matches ties on CCR filed by Duane R. Brunner, PLS 1314, dated 18 March 1996.  
 Matches ties on CCR filed by Larry G. Williams, PLS 1327, dated 11 January 1995.

NOTE: Two other PK Nails were found at the location, One 5.45' East and the other 1.23' Northwest.

Coordinates established using classical static GPS, minimum two independent vectors  
 Included in the HPGN adjustment of 1993

Description of Corner Evidence Set:

None


REFERENCE MEASUREMENTS: (At Least Three)

Description:	Distance	Bearing
	Feet	True <input type="checkbox"/> Magnetic <input checked="" type="checkbox"/>
RP # 1 IP4 w/cap in Field Entrance	70.07'	N 78°49'51" E
RP # 2 PK Nail	5.45'	East
RP # 3 IP4F	87.48'	S 89°54'00" E
RP # 4 IP4 (Not Located)	137.04'	S 89°54'00" E
RP # 5 IP4 (Not Located)	198.70'	S 89°54'00" E
RP # 6 60d Nail in Tee Fence Corner	46.45'	West
RP # 7 Small PK Nail	1.23'	N 69°41'00" W

SC # 1 NW Corner 2" Aluminum Cap (ODOT C-16-39)	Ground Dist.: 2640.59'	Grid Dist.: 2640.29'	Grid Bearing: N 00°07'43" E
SC # 2 SW Corner 2" Aluminum Cap (ODOT C-16-37)	Ground Dist.: 2636.94'	Grid Dist.: 2636.64'	Grid Bearing: S 00°07'38" W

STATEMENT OF METHOD USED TO DETERMINE CORNER LOCATION: (Lost Corners Only)

SKETCH:

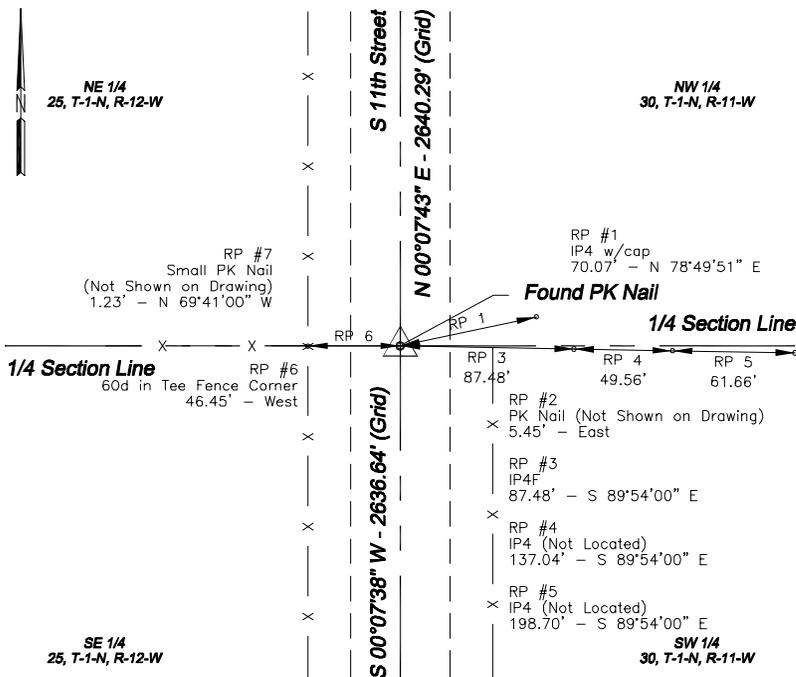


SURVEYOR'S CERTIFICATION: This is to certify that the monuments and accessories indicated above are correctly described and shown. I further certify that the corner records were checked for any filings prior to making this survey.

Signature: Edward Deral Paulk Jr., PLS 1279  
 City of Lawton, Engineering Department  
 Firm \_\_\_\_\_ Phone Number \_\_\_\_\_  
 103 SW 4th Street (580) 581-3318  
 Street Address/Post Office Box \_\_\_\_\_ Web Site \_\_\_\_\_  
 Lawton, Oklahoma 73501 www.cityof.lawton.ok.us/engineering  
 City, State and Zip Code \_\_\_\_\_  
 14 August 2003 P.L.S. 1279  
 Date and Registration Number \_\_\_\_\_

OKLAHOMA STATE PLANE COORDINATES: NAD 1983 (ADJ 1993 HARN)  
 Coordinates are in US Survey Feet.

X: E 1846647.619 Y: N 435402.471 ZONE: SOUTH

Accepted and Filed: \_\_\_\_\_  
 Archivist, Archives & Records Division  
 Oklahoma Department of Libraries  
 200 Northeast 18th Street  
 Oklahoma City, Oklahoma 73105

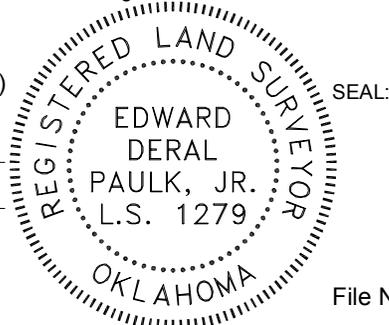

File Name: C-16-38-108S4.dwg