


OKLAHOMA CERTIFIED CORNER RECORD

X Existing \_\_\_\_\_ Obliterated \_\_\_\_\_ Lost

C.M. Document No. \_\_\_\_\_

NE Corner of Section 27 Township 2 North Range 11 West

Meridian I.M. County Comanche



DESCRIPTION OF ORIGINAL MONUMENT AND ACCESSORIES AND ANY SUBSEQUENT RESTORATION: (Give Sources of Information)

Set Sandstone 16 x 12 x 3  
Department of Libraries GLO Notes.

MONUMENT DESCRIPTION:

Description of Corner Evidence Found:

Found ODOT C-16-242  
Matches ties of CCR filed by Duane Brunner, PLS 1314 dated 6 June 1996.  
Matches ties of CCR filed by Dennie J. Hightower, PLS 1285 dated 10 September 1991.

Coordinates established using classical static GPS, minimum two independent vectors  
Included in the HPGN adjustment of 1993

Description of Corner Evidence Set:

None


REFERENCE MEASUREMENTS: (At Least Three)

Description:	Distance		Bearing	
	Feet		True	Magnetic
RP # 1 ODOT Cap C-16-89	512.52		<input type="checkbox"/>	<input checked="" type="checkbox"/> No Declination
RP # 2 Top Fire Hydrant M&H 1991	125.08		<input type="checkbox"/>	<input checked="" type="checkbox"/> N 02°33'32" E
RP # 3 RR Spike in Power Pole	45.55		<input type="checkbox"/>	<input checked="" type="checkbox"/> N 19°13'27" E
RP # 4 1/2" Iron Pin	45.64		<input type="checkbox"/>	<input checked="" type="checkbox"/> S 54°27'34" E
RP # 5 1/2" Iron Pin	44.85		<input type="checkbox"/>	<input checked="" type="checkbox"/> S 41°43'54" E
RP # 6 ODOT Cap C-16-142	60.82		<input type="checkbox"/>	<input checked="" type="checkbox"/> S 46°45'46" W
RP # 7 60d Nail in Power Pole	66.11		<input type="checkbox"/>	<input checked="" type="checkbox"/> S 62°11'39" W
			<input type="checkbox"/>	<input checked="" type="checkbox"/> N 36°54'38" W

SC # 1 E 1/4 Corner 3/4" Brass Rod ODOT C-16-243	Ground Dist.: 2644.06'	Grid Dist.: 2643.75'	Grid Bearing: S 00°12'07" W
SC # 2 N 1/4 Corner Found ODOT Brass Cap C-16-239	Ground Dist.: 2639.96'	Grid Dist.: 2639.65'	Grid Bearing: N 89°46'27" W

STATEMENT OF METHOD USED TO DETERMINE CORNER LOCATION: (Lost Corners Only)

SKETCH:

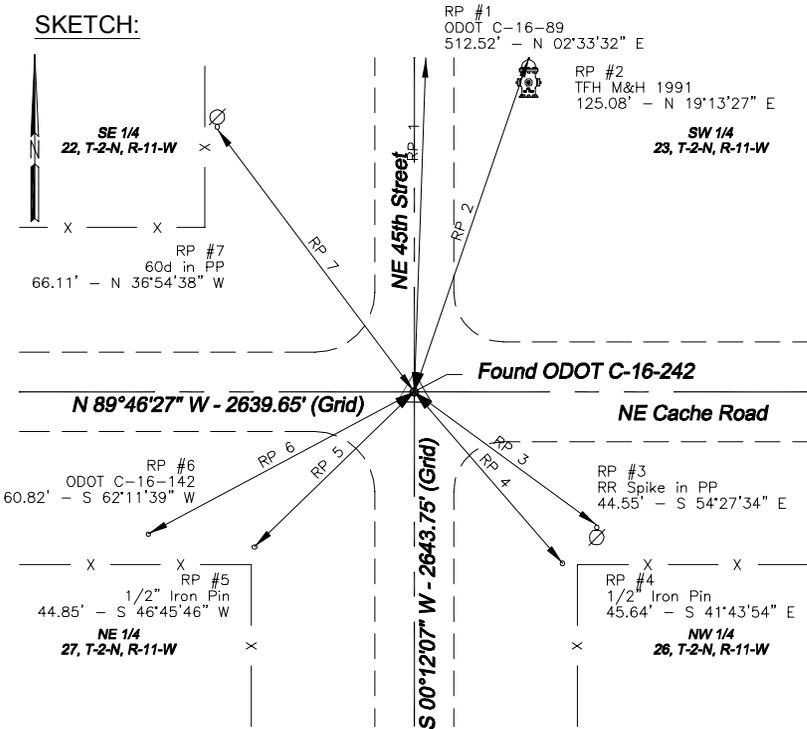


SURVEYOR'S CERTIFICATION: This is to certify that the monuments and accessories indicated above are correctly described and shown. I further certify that the corner records were checked for any filings prior to making this survey.

Signature: Edward Deral Paulk Jr., PLS 1279  
**City of Lawton, Engineering Department**  
 Firm \_\_\_\_\_ Phone Number \_\_\_\_\_  
**103 SW 4th Street** (580) 581-3318  
 Street Address/Post Office Box \_\_\_\_\_ Web Site \_\_\_\_\_  
**Lawton, Oklahoma 73501** www.cityof.lawton.ok.us/engineering  
 City, State and Zip Code \_\_\_\_\_  
**5 August 2003** P.L.S. 1279  
 Date and Registration Number \_\_\_\_\_

OKLAHOMA STATE PLANE COORDINATES: NAD 1983 (ADJ 1993 HARN)  
Coordinates are in US Survey Feet.

X: E 1867788.181 Y: N 469572.060 ZONE: SOUTH

Accepted and Filed: \_\_\_\_\_  
 Archivist, Archives & Records Division  
 Oklahoma Department of Libraries  
 200 Northeast 18th Street  
 Oklahoma City, Oklahoma 73105

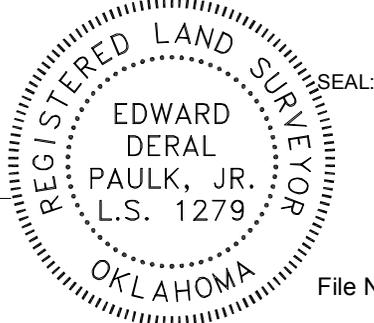

File Name: C-16-242-22S7.dwg