


OKLAHOMA CERTIFIED CORNER RECORD

X Existing \_\_\_\_\_ Obliterated \_\_\_\_\_ Lost

C.M. Document No. \_\_\_\_\_

CTR \_\_\_\_\_ Corner of Section \_\_\_\_\_ 3 Township \_\_\_\_\_ 1 North Range \_\_\_\_\_ 12 West

Meridian I.M. County Comanche



DESCRIPTION OF ORIGINAL MONUMENT AND ACCESSORIES AND ANY SUBSEQUENT RESTORATION: (Give Sources of Information)

Center not set on original survey.

Department of Libraries GLO Notes.

MONUMENT DESCRIPTION:

Description of Corner Evidence Found:  
None Found

Coordinates established using classical static GPS, minimum two independent vectors  
Included in the HPGN adjustment of 1993

Description of Corner Evidence Set:  
Set 5/8" Iron Pin  
Set 5/8" Iron Pin from Park Ridge Addition Part 6 Sub-Division Plat.


REFERENCE MEASUREMENTS: (At Least Three)

Description:	Distance		Bearing	
	Feet		True	Magnetic
RP # 1 Found 60d Nail in Power Pole	41.10'		<input type="checkbox"/>	<input checked="" type="checkbox"/>
RP # 2 Found 40d Nail in Railroad Tie Fence Post	6.55'			No Declination
RP # 3 Set 60d Nail in Railroad Tie Fence Post	9.80'			N 08° E
RP # 4 Found 1/2" Iron Pin in Fence	19.10'			East
RP # 5 Found 1/2" Iron Pin at the NW Corner of Lot Nineteen (19) Block Ten (10), Park Ridge Addition Part 6	410.00'			S 46° E
				West
				East

SC # 1 N 1/4 Corner Found North Fork Brass Cap	Ground Dist.: 2654.23'	Grid Dist.: 2654.06'	Grid Bearing: N 00°14'50"E
SC # 2 E 1/4 Corner Found Survey Marker	Ground Dist.: 2624.51'	Grid Dist.: 2624.34'	Grid Bearing: N 89°50'32" E
SC # 3 S 1/4 Corner Found ODOT Brass Cap C-16-427	Ground Dist.: 2636.14'	Grid Dist.: 2635.98'	Grid Bearing: S 00°15'58" W
SC # 4 W 1/4 Corner Found 1/2" Iron Pin	Ground Dist.: 2626.20'	Grid Dist.: 2626.03'	Grid Bearing: S 89°50'34" W

STATEMENT OF METHOD USED TO DETERMINE CORNER LOCATION: (Lost Corners Only)

SKETCH:

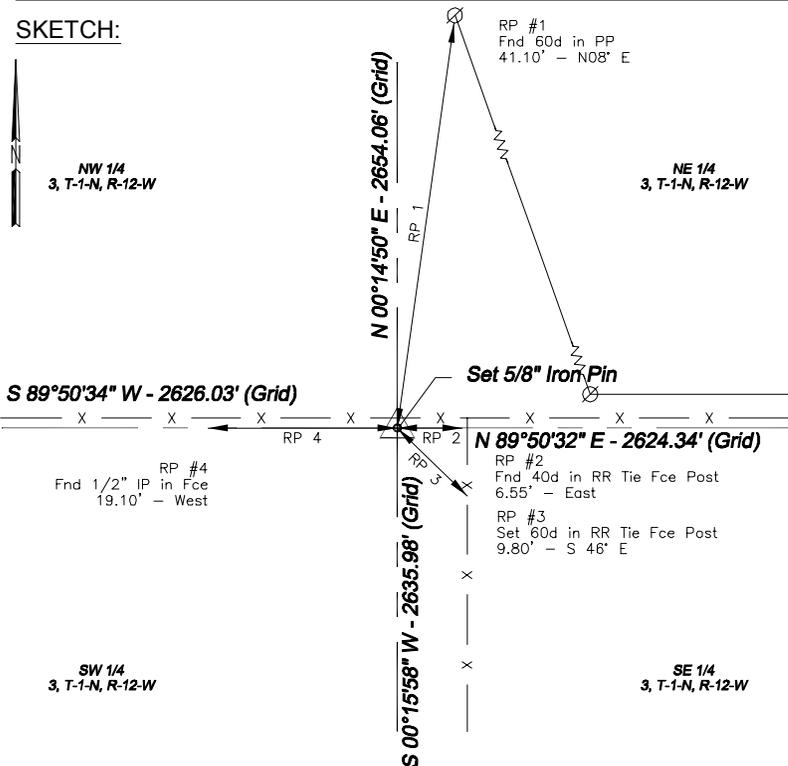


SURVEYOR'S CERTIFICATION: This is to certify that the monuments and accessories indicated above are correctly described and shown. I further certify that the corner records were checked for any filings prior to making this survey.

Signature: Edward Deral Paulk Jr., PLS 1279  
 City of Lawton, Engineering Department  
 Firm \_\_\_\_\_ Phone Number \_\_\_\_\_  
 103 SW 4th Street (580) 581-3318  
 Street Address/Post Office Box \_\_\_\_\_ Web Site \_\_\_\_\_  
 Lawton, Oklahoma 73501 www.cityof.lawton.ok.us/engineering  
 City, State and Zip Code \_\_\_\_\_  
 27 August 2003 P.L.S. 1279  
 Date and Registration Number \_\_\_\_\_

OKLAHOMA STATE PLANE COORDINATES: NAD 1983 (ADJ 1993 HARN)  
 Coordinates are in US Survey Feet.  
 X: E 1833511.375 Y: N 456582.507 ZONE: SOUTH

Accepted and Filed: \_\_\_\_\_  
 Archivist, Archives & Records Division  
 Oklahoma Department of Libraries  
 200 Northeast 18th Street  
 Oklahoma City, Oklahoma 73105



SEAL: