


OKLAHOMA CERTIFIED CORNER RECORD

X Existing \_\_\_\_\_ Obliterated \_\_\_\_\_ Lost

C.M. Document No. \_\_\_\_\_

NW Corner of Section 30 Township 2 North Range 11 West

Meridian I.M. County Comanche



DESCRIPTION OF ORIGINAL MONUMENT AND ACCESSORIES AND ANY SUBSEQUENT RESTORATION: (Give Sources of Information)

Set Sandstone 18 x 10 x 3 1/2  
 Department of Libraries GLO Notes.

MONUMENT DESCRIPTION:

Description of Corner Evidence Found:  
 Found Stem of ODOT monument C-16-160.  
 Matches ties on CCR filed by Duane R. Brunner, PLS 1314, dated 19 January 1996.

Coordinates established using classical static GPS, minimum two independent vectors  
 Included in the HPGN adjustment of 1993

Description of Corner Evidence Set:  
 None Set. Area has large amount of traffic.


REFERENCE MEASUREMENTS: (At Least Three)

| Description:                                      | Distance | Bearing  |
|---|----------|--|
|   | Feet     | True <input type="checkbox"/> Magnetic <input checked="" type="checkbox"/> No Declinator |
| RP # 1 ODOT Bronze Cap NW side of bridge opening. | 43.63'   | S 74° E  |
| RP # 2 1/2" Iron Pin                              | 43.78'   | S 53° E  |
| RP # 3 Square on Curb (FEMA Bench Mark)           | 40.68'   | S 51° W  |
| RP # 4 "X" on Back of Curb                        | 68.17'   | N 47° W  |
| RP # 5 "X" on Back of Curb                        | 34.68'   | North  |

|                                     |                        |                      |                             |
|-------------------------------------|------------------------|----------------------|-----------------------------|
| SC # 1 N 1/4 Corner PK Nail         | Ground Dist.: 2590.22' | Grid Dist.: 2589.93' | Grid Bearing: S 89°55'59" E |
| SC # 2 W 1/4 Corner "X" in Concrete | Ground Dist.: 2643.87' | Grid Dist.: 2643.56' | Grid Bearing: S 00°17'51" W |

STATEMENT OF METHOD USED TO DETERMINE CORNER LOCATION: (Lost Corners Only)

SKETCH:

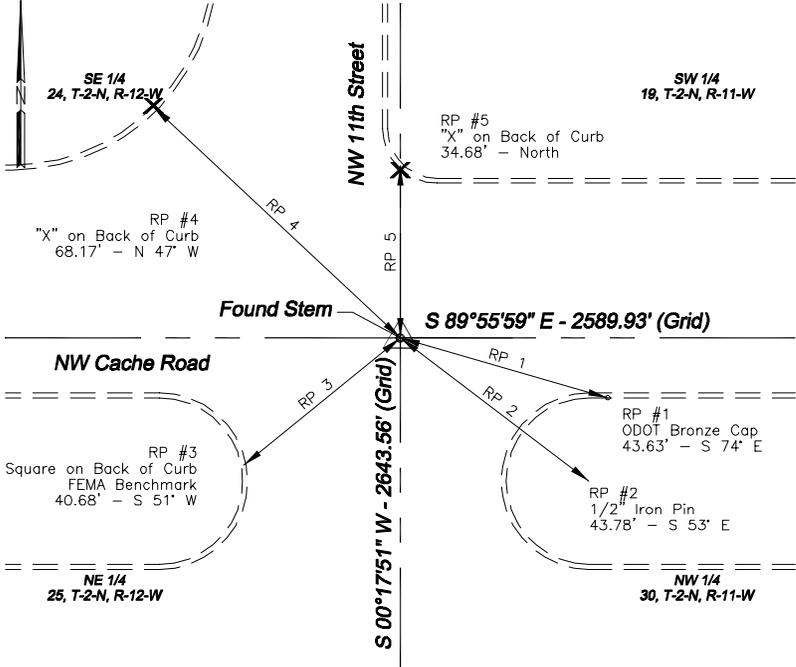

SURVEYOR'S CERTIFICATION: This is to certify that the monuments and accessories indicated above are correctly described and shown. I further certify that the corner records were checked for any filings prior to making this survey.

Signature: Edward Deral Paulk Jr., PLS 1279  
 City of Lawton, Engineering Department  
 Firm 103 SW 4th Street Phone Number (580) 581-3318  
 Street Address/Post Office Box Lawton, Oklahoma 73501 Web Site www.cityof.lawton.ok.us/engineering  
 City, State and Zip Code 23 July 2003 P.L.S. 1279  
 Date and Registration Number

OKLAHOMA STATE PLANE COORDINATES: NAD 1983 (ADJ 1993 HARN)  
 Coordinates are in US Survey Feet.  
 X: E 1846744.851 Y: N 469706.076 ZONE: SOUTH

Accepted and Filed: \_\_\_\_\_  
 Archivist, Archives & Records Division  
 Oklahoma Department of Libraries  
 200 Northeast 18th Street  
 Oklahoma City, Oklahoma 73105

