


OKLAHOMA CERTIFIED CORNER RECORD

X Existing \_\_\_\_\_ Obliterated \_\_\_\_\_ Lost

C.M. Document No. \_\_\_\_\_

W1/4 Corner of Section 34 Township 2 North Range 11 West

Meridian I.M. County Comanche



DESCRIPTION OF ORIGINAL MONUMENT AND ACCESSORIES AND ANY SUBSEQUENT RESTORATION: (Give Sources of Information)

Set Sandstone 16 x 11 x 3  
 Department of Libraries GLO Notes

MONUMENT DESCRIPTION:

Description of Corner Evidence Found:

Found 1/2" Iron Pin.  
 Matches Ties of CCR filed by Duane R. Brunner, PLS 1314, dated 9 July 1996.  
 Matches Ties of CCR filed by Duane R. Brunner, PLS 1314, dated 25 February 1994.  
 Matches Ties of CCR filed by Phillip Stevenson, PLS 1159, dated 11 May 1989.  
 Matches Ties of CCR filed by Frank Roberts, PLS 985, dated 10 December 1987.

Coordinates established using classical static GPS, minimum two independent vectors  
 Included in the HPGN adjustment of 1993

Description of Corner Evidence Set:

Added Three (3) 1/2" Iron Pins @ 50, 100, 150 - S 60° W for new references.  
 Flower Mound Road to be widened and corner expected to be destroyed during construction.


REFERENCE MEASUREMENTS: (At Least Three)

Description:	Distance	Bearing
	Feet	True <input type="checkbox"/> Magnetic <input checked="" type="checkbox"/>
RP # 1 Set 1/2" Iron Pin	50.0'	No Declination
RP # 2 Set 1/2" Iron Pin	100.0'	S 60° W
RP # 3 Set 1/2" Iron Pin	150.0'	S 60° W
RP # 4 Top Fire Hydrant (ADV 2000)	50.6'	N 90° W
RP # 5 80d in Power Pole	19.7'	S 83° E

SC # 1	N 1/16 Corner	Found 3/8" Iron Pin	Ground Dist.: 1320.85'	Grid Dist.: 1320.70'	Grid Bearing: N 00°16'35" E
SC # 2	SW Corner	Survey Marker	Ground Dist.: 2642.17'	Grid Dist.: 2641.87'	Grid Bearing: S 00°16'56" W

STATEMENT OF METHOD USED TO DETERMINE CORNER LOCATION: (Lost Corners Only)

SKETCH:

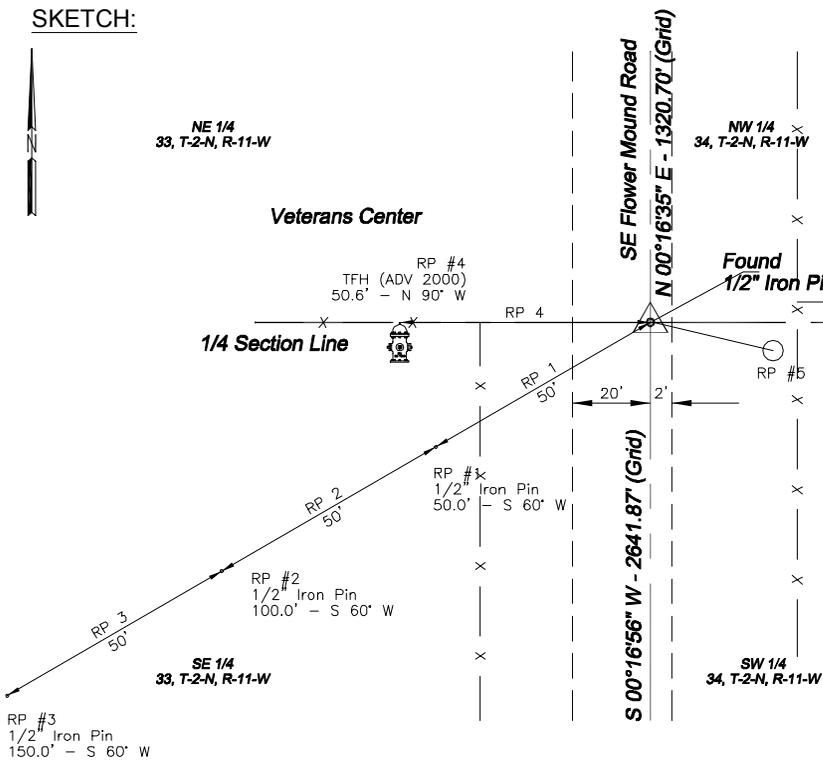

SURVEYOR'S CERTIFICATION: This is to certify that the monuments and accessories indicated above are correctly described and shown. I further certify that the corner records were checked for any filings prior to making this survey.

Signature: Edward Deral Paulk Jr., PLS 1279  
 City Of Lawton, Engineering Department  
 Firm \_\_\_\_\_ Phone Number \_\_\_\_\_  
 103 SW 4th Street (580) 581-3318  
 Street Address/Post Office Box \_\_\_\_\_  
 Lawton, Oklahoma 73501  
 City, State and Zip Code \_\_\_\_\_  
 12 August 2003 P.L.S. 1279  
 Date and Registration Number \_\_\_\_\_


OKLAHOMA STATE PLANE COORDINATES: NAD 1983 (ADJ 1993 HARN)  
 Coordinates are in US Survey Feet.

X: E 1862489.632 Y: N 461668.601 ZONE: SOUTH

Accepted and Filed: \_\_\_\_\_

Archivist, Archives & Records Division  
 Oklahoma Department of Libraries  
 200 Northeast 18th Street  
 Oklahoma City, Oklahoma 73105

Date: \_\_\_\_\_

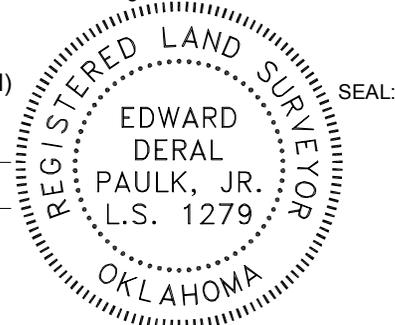

File Name: 45S4.dwg