


OKLAHOMA CERTIFIED CORNER RECORD

X Existing _____ Obliterated _____ Lost

C.M. Document No. _____

S1/4 Corner of Section 27 Township 2 North Range 12 West

Meridian I.M. County Comanche



DESCRIPTION OF ORIGINAL MONUMENT AND ACCESSORIES AND ANY SUBSEQUENT RESTORATION: (Give Sources of Information)

Set Sandstone 18 x 14 x 4
Department of Libraries GLO Notes.

MONUMENT DESCRIPTION:

Description of Corner Evidence Found:

Found 'X' in Concrete (Set from Sub-division Ties).
Matches ties on CCR filed by Dennie J. Hightower, PLS 1285, dated 25 February 2002. (Filed as N/4, 34, T-2-N, R-12-W).

'X' is located 32.5' South of the North Back of Curb, 33.0' North of the South Back of Curb and 2.4' East of a Seam in the Concrete Paving.

Coordinates established using classical static GPS, minimum two independent vectors
Included in the HPGN adjustment of 1993

Description of Corner Evidence Set:

None

REFERENCE MEASUREMENTS: (At Least Three)

Description:


RP # 1	IP4F	50.1'	N 39°11'48" E
RP # 2	Chisled 'X' on Concrete Curb (Destroyed)	54.86'	S 00°19'42" E
RP # 3	40d Nail in Power Pole.	38.45'	S 12°12'06" W
RP # 4	Chisled 'X' on North Side of SSMH Concrete Ring.	49.28'	N 47°10'20" W
RP # 5	Chisled 'X' on Concrete Curb.	46.92'	N 02°44'45" W
RP # 6	40d Nail in Power Pole.		

Distance Feet	Bearing	
	True	Grid
50.1'	<input type="checkbox"/>	<input checked="" type="checkbox"/> No Declination
54.86'	North (Mag No Declination)	
54.86'	N 39°11'48" E	
38.45'	S 00°19'42" E	
49.28'	S 12°12'06" W	
46.92'	N 47°10'20" W	
	N 02°44'45" W	

SC # 1	SE Corner	Ground Dist.:	Grid Dist.:	Grid Bearing:
SC # 2	SW Corner Chisled 'X' on Concrete Median	Ground Dist.: 2622.53'	Grid Dist.: 2622.23'	Grid Bearing: N 89°32'19" W


STATEMENT OF METHOD USED TO DETERMINE CORNER LOCATION: (Lost Corners Only)

SKETCH:

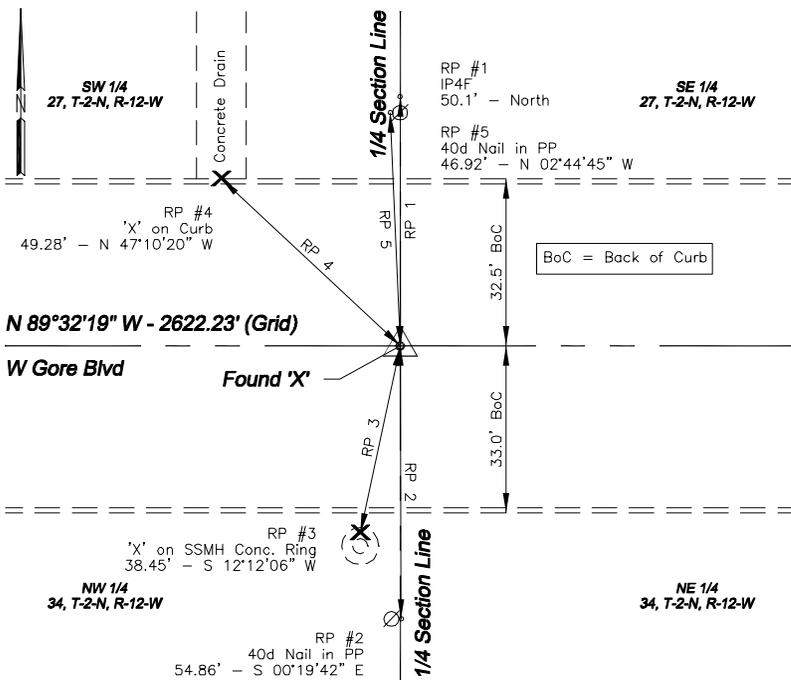

SURVEYOR'S CERTIFICATION: This is to certify that the monuments and accessories indicated above are correctly described and shown. I further certify that the corner records were checked for any filings prior to making this survey.

Signature: Edward Deral Paulk Jr., PLS 1279
City of Lawton, Engineering Department
Firm: 103 SW 4th Street Phone Number: (580) 581-3318
Street Address/Post Office Box: Lawton, Oklahoma 73501 Web Site: www.cityof.lawton.ok.us/engineering
City, State and Zip Code: 12 September 2003 P.L.S. 1279
Date and Registration Number



OKLAHOMA STATE PLANE COORDINATES: NAD 1983 (ADJ 1993 HARN)
Coordinates are in US Survey Feet.

X: E 1833536.202 Y: N 464516.711 ZONE: SOUTH

Accepted and Filed: _____

Archivist, Archives & Records Division
Oklahoma Department of Libraries
200 Northeast 18th Street
Oklahoma City, Oklahoma 73105

Date: _____

File Name: 28S2.dwg